



Sewage Pump

Page	Performance curves / Technical data
3	XD Submersible Drainage Pumps
5	XV Submersible Vortex Sewage Pumps
7	GD Submersible Grinder Pumps
9	HM Submersible Vortex Sewage Pumps
11	SD Submersible Drainage Pumps
13	SV Submersible Vortex Sewage Pumps
15	SVN Submersible Vortex Sewage Pumps
17	SC Submersible Cutter Sewage Pumps
19	SA Submersible Agitator Sewage Pumps
21	Guide Rail System


General Data/Material



Operating Conditions	Applications	Emptying of septic tanks and residential sumps.
	Fluid Temperature	0 to 50 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase)
	Impeller	Open Impeller
	Shaft Seal/Material	Double seals
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	SS304+Nylon
Motor Cover	SS304
Motor Casing	SS 304
Fixing Ring	SS304
Pump Body	SS304
Mechanical seal	Sic/Sic/NBR
Impeller	SS 304
Key	SS304
Pump Casing	SS304
Oil Seal	NBR
Shaft	SS304
V-type Axial Oil Seal	NBR
Suction flange	SS304

Characteristic curves N= 2900 rpm

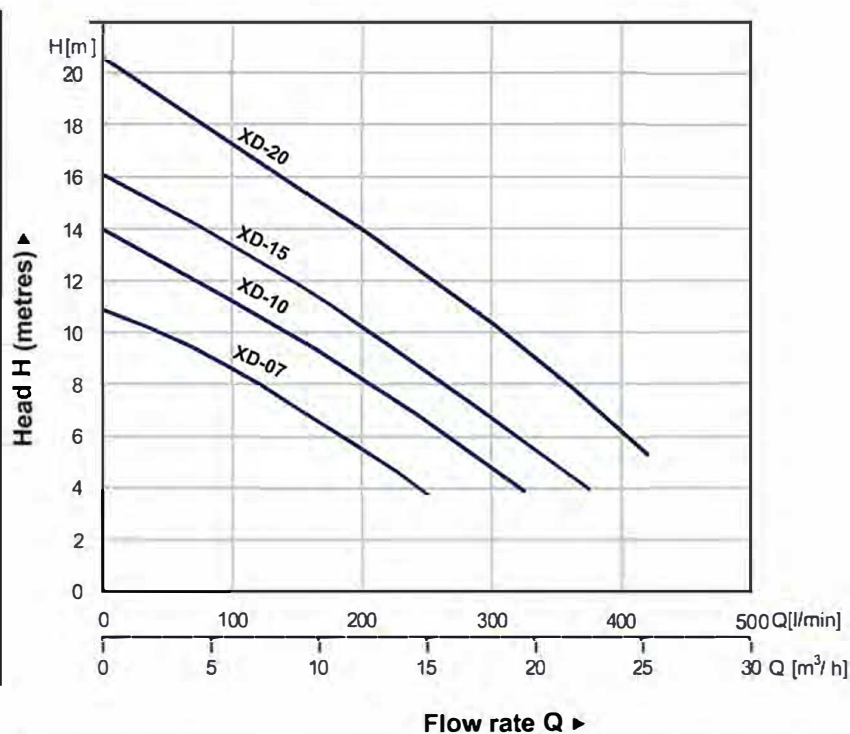


Specifications

Model	Power HP (kW)	Discharge inch	Phase (Voltage)	Standard		Max		Solid Passage mm	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM		
XD-07	0.75(0.55)	RP 1 1/2"	1 ϕ 220V-240V / 3 ϕ 220V-240V / 380V-415V	8.6	100	10.9	250	8	10
XD-10	1.0(0.75)	RP 1 1/2"	1 ϕ 220V-240V / 3 ϕ 220V-240V / 380V-415V	11.2	100	14	325	8	10
XD-15	1.5(1.1)	RP 1 1/2"	1 ϕ 220V-240V / 3 ϕ 220V-240V / 380V-415V	11.9	150	16.1	375	8	10
XD-20	2.0(1.5)	RP 1 1/2"	3 ϕ 220V-240V / 380V-415V	15.6	150	20.6	420	8	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

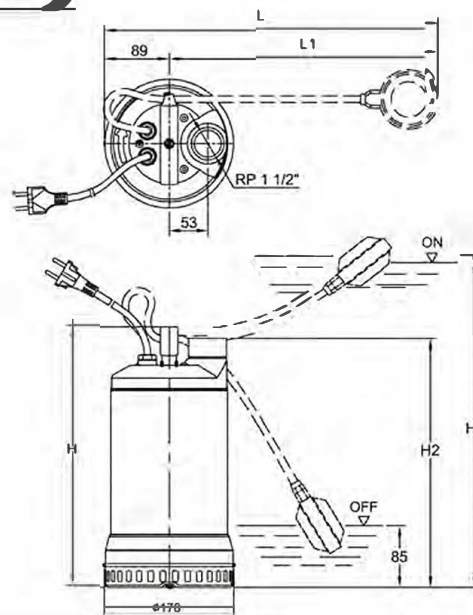

SINGLE-PHASE

Model	Dimension (mm)					N.W. kg
	H1	H2	H3	H4	H5	
XD-07	357	437	341	459	370	12
XD-10	407	497	391	514	425	15
XD-15	407	497	391	514	425	17

THREE-PHASE

Model	Dimension (mm)		N.W. kg
	H1	H2	
XD-07	357	341	12
XD-10	357	341	12
XD-15	407	391	15
XD-20	407	391	17


General Data/Material



Operating Conditions	Applications	Emptying of septic tanks and residential sump s.
	Fluid Temperature	0 to 35°C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase)
	Impeller	Vortex Impeller
	Shaft Seal/Material	Double seals
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	SS 304+Nylon
Motor Cover	SS 304
Motor Casing	SS 304
Fixing Ring	SS 304
Pump Body	SS 304
Mechanical seal	Sic/Sic/NBR
Impeller	SS 304
Key	SS 304
Pump Casing	SS 304
Oil Seal	NBR
Shaft	SS 304
V-type Axial Oil Seal	NBR
Suction flange	SS 304

Characteristic curves N= 2900 rpm

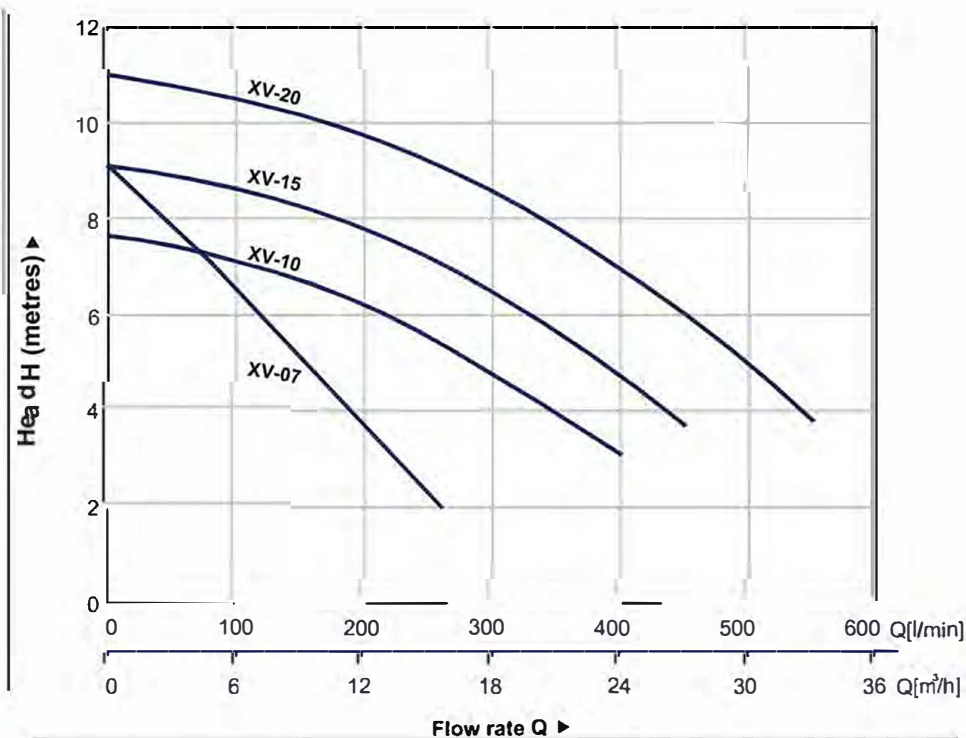


Specifications

Model	Power HP (kW)	Discharge inch	Phase (Voltage)	Standard		Max		Solid Passage mm	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM		
XV-07	0.75(0.55)	RP 1 1/2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	7.1	80	9.1	260	35	5
XV-10	1.0(0.75)	RP 2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	7.1	100	7.7	400	50	10
XV-15	1.5(1.1)	RP 2"	1φ 220V-240V / 3φ 220V-240V / 380V-415V	8.6	100	9.1	450	50	10
XV-20	2.0(1.5)	RP 2"	3φ 220V-240V / 380V-415V	10.2	150	11	550	50	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

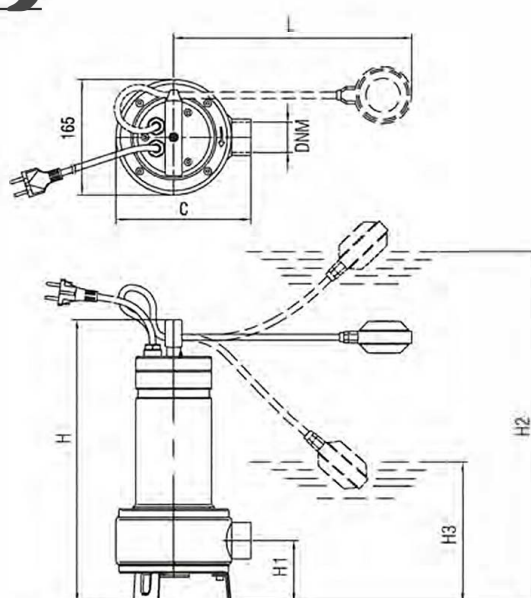


SINGLE-PHASE

Model	Dimension (mm)							
	Ø	Ø	Ø	Ø	Ø	C	DNM	N.W. kg
XV-07	403	88	483	185	350	193	RP1 1/2"	11
XV-10	486	111.5	566	268	350	198	RP 2"	14
XV-15	486	111.5	566	268	350	198	RP 2"	15

THREE-PHASE

Model	Dimension (mm)				
	Ø	Ø	Ø	DNM	N.W. kg
XV-07	403	88	193	RP1 1/2"	11
XV-10	436	111.5	198	RP 2"	12
XV-15	486	111.5	198	RP 2"	14
XV-20	486	111.5	198	RP 2"	15

Model code

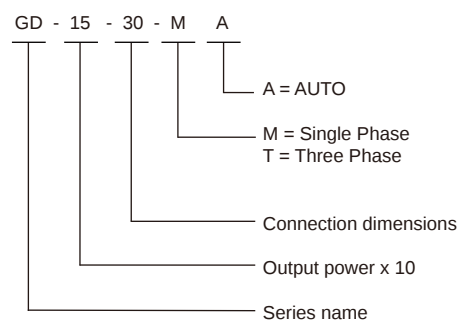

Cutter HRC55-60



Semi-open Impeller



Feature

Robust construction

Superior Heat Dissipation

- Vortex impeller design prevents clogging by cutting up articles
- Radial cutter and cutter ring SS 440C : corrosion resistant material, hardened to 55-60 Rockwell C
- Specific single phase design for starting torque, torque is five times stronger than General capacitor pump
- Horizontal casing with female thread can be fit the pipe directly
- Double mechanical seals Upper:CA/CE/NBR
Lower:SIC/SIC/NBR



Application

- Waste water treatment
- Sewage water
- Drainage of wastewater from individual residences,apartment buildings,recreational developments,motels
- Transferring wastewater,Schools,federal,state and local parks
- To transfer various wastewater and sewage

Specifications


Operating Conditions	Liquid Temperature	0~40°C (32~104°F)
	MAX.depth	10M
Motor	Frequency	50Hz
	Pole	2 Pole
	Type	Dry Type
	Insulation	Class E (120°C)
Pump	Protection	IP 68
	Protector	Thermal protection
	Bearing	Ball Type
	Mechanical seal	Dual. Mechanical Seal
	Impeller	Semi-Open

Characteristic curves N= 2850 rpm

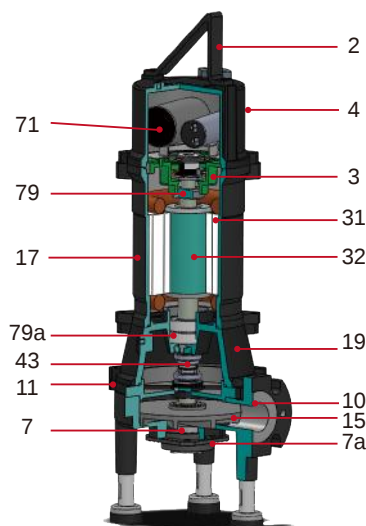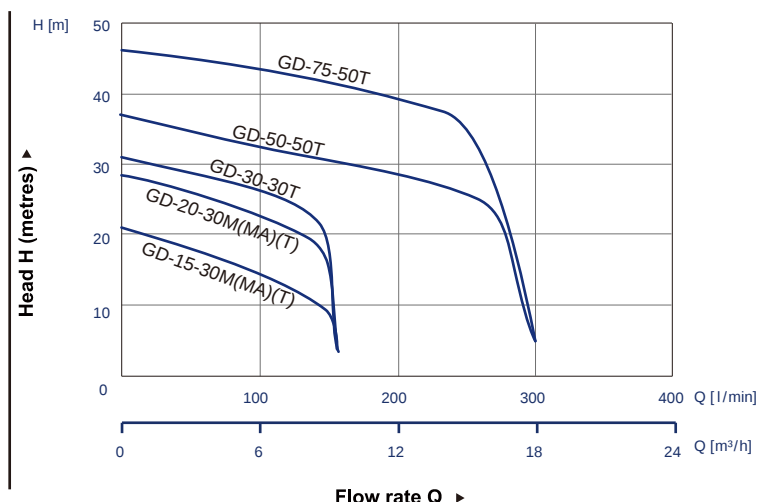

No.	Component	Material	
		1.5HP/2HP/3HP	5HP/7.5HP
2	Handle	SS SS400/A36	SS 41
3	Bracket	EN-GJL-200	FC 200
4	Upper Cover	EN-GJL-200	FC 200
7	Cutter	SS 440C	SS 440C
7a	Cutter Ring	SS 440C	SS 440C
10	Pump Casing	EN-GJL-200	EN-GJL-200
11	Seal Housing	EN-GJL-200	EN-GJL-200
15	Impeller	EN-GJL-200	EN-GJL-200
17	Motor Housing	EN-GJL-200	EN-GJL-200
19	Oil Chamber	EN-GJL-200	EN-GJL-200
31	Stator		
32	Shaft and Rotor	SS 410	SUS 410
43	Mech. Seal	Upper:CA/CE/NBR Lower:SIC/SIC/NBR	Upper:CA/CE/NBR Lower:SIC/SIC/NBR
71	Capacitor	-	-
79	Upper Bearing	6203	6304
79a	Lower Bearing	6304	6305

Dimensions

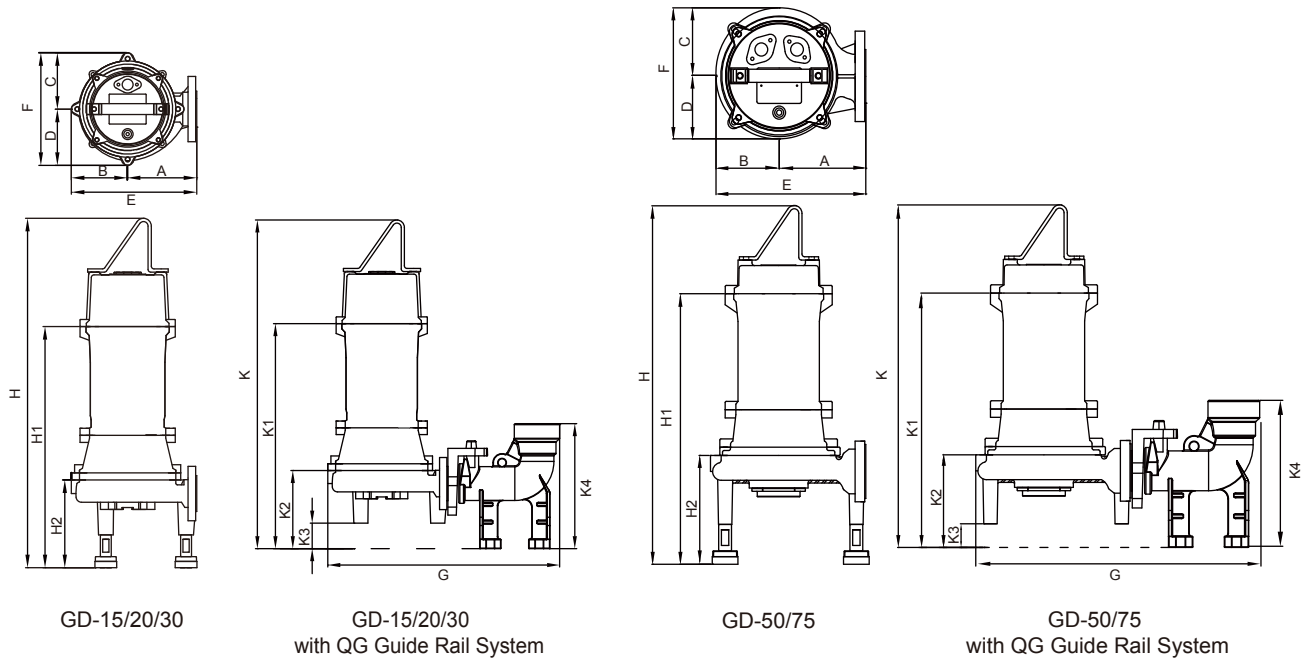

Model	Dimensions (mm)														
	A	B	C	D	E	F	G	H	H1	H2	K	K1	K2	K3	K4
GD-15-30	128	102	103	103	230	206	445	640	445	160	630	432	150	50	240
GD-20-30	128	102	103	103	230	206	445	640	445	160	630	432	150	50	240
GD-30-30	128	102	103	103	230	206	445	680	485	160	670	472	150	50	240
GD-50-50	164	119	125	114	283	239	500	669	509	186	637	477	154	29	240
GD-75-50	164	119	125	114	283	239	500	709	549	186	677	517	154	29	240

Specifications

Model	Phase	Voltage (V)	Power		Head (Pressure)		Flow (Capacity)		Connection	Cable	Weight
			HP	KW	Rated (M)	Max. (M)	Rated(L/min)	Max. (L/min)	Outlet	M	kg
GD-15-30M	1 Ø	220~240	1.5	1.1	18	21	60	160	1-1/4"	10	30
GD-15-30MA		220~240	1.5	1.1	18	21	60	160	1-1/4"	10	30.5
GD-20-30M		220~240	2	1.5	22	28.5	100	160	1-1/4"	10	32.8
GD-20-30MA		220~240	2	1.5	22	28.5	100	160	1-1/4"	10	33.3
GD-15-30T	3 Ø	380~415	1.5	1.1	18	21	60	160	1-1/4"	10	30
GD-20-30T		380~415	2	1.5	22	28.5	100	160	1-1/4"	10	32.8
GD-30-30T		380~415	3	2.2	24	31	120	160	1-1/4"	10	35
GD-50-50T		380~415	5	3.7	25	37	250	300	2"	10	44
GD-75-50T		380~415	7.5	5.5	35	46	250	300	2"	10	49

- Model with "M" is single.
- Model with "T" is three.
- Model with "A" is AUTO.


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon 6
Motor Cover	ADC 12
End Bracket	SECC
Pump Casing	Cast Iron GJL 200
Impeller	TPU
Strainer	PVC
Agitator	SMF 5030
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Shaft	SS 410
Motor Housing	ADC 12

Characteristic curves N=2900 rpm

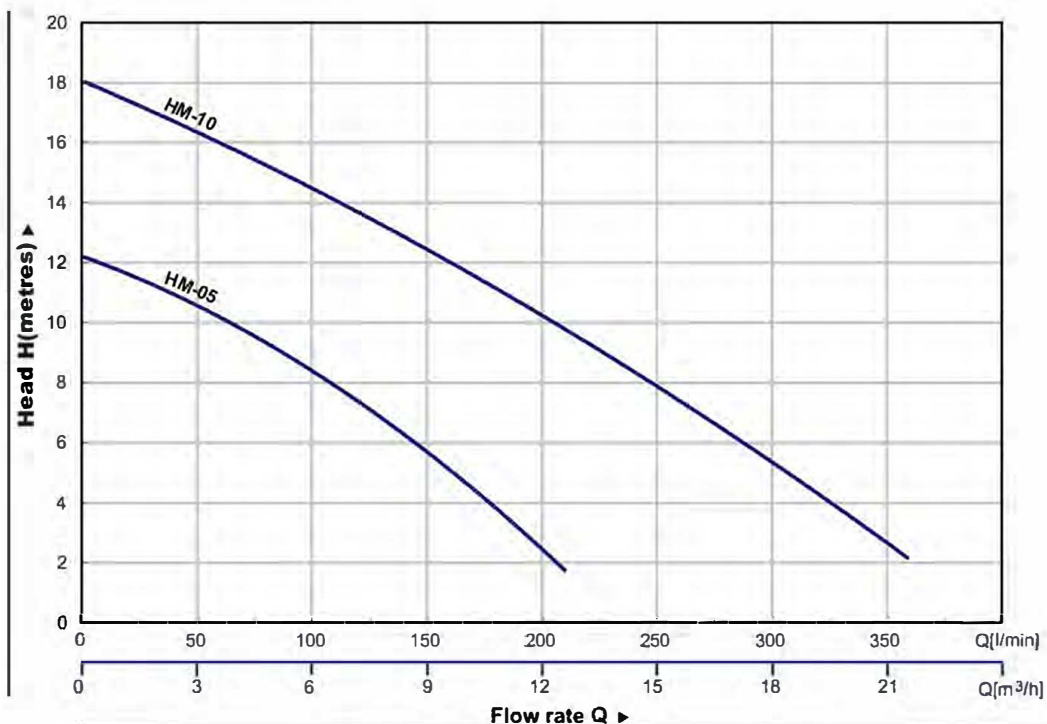


Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
HM 05-50	1/2 (0.37)	2"	1φ/3φ	7	120	12	240	10	12.5	10
HM 10-50(80)	1 (0.75)	2"/3"	1φ/3φ	10	200	18	350	10	15.5	10

Auto Float Switches are available in Single-phase

Dimensions and Weights

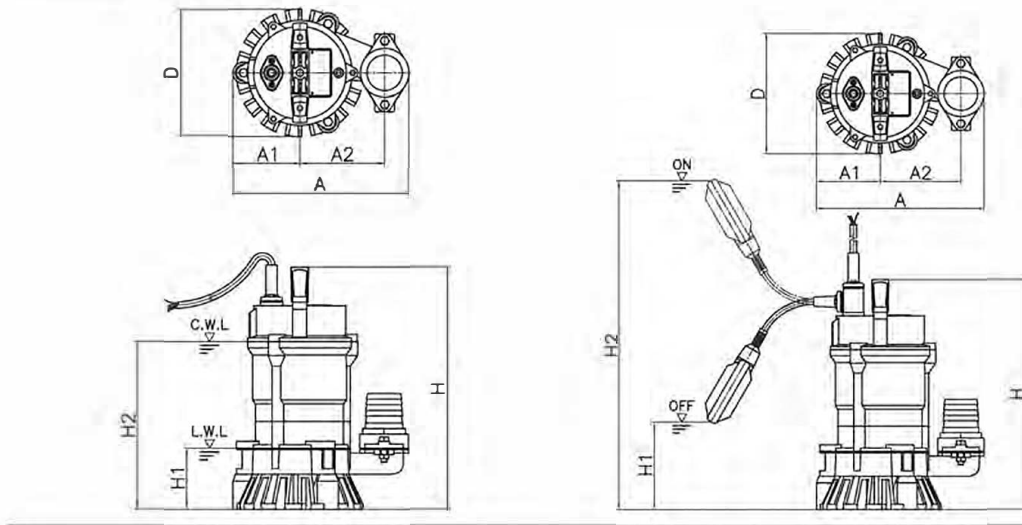

Model	Dimension (mm)						
	A	A1	A2	D	H	H1	H2
HM-05-50	250	95	120	180	344	87	239
HM-05MA-50	250	95	120	180	344	131	491
HM-10-50(80)	280	95	135	180	369	87	264
HM-10MA-50(80)	280	95	135	180	369	156	516

A= Auto Float Switch


General Data/Material



Operating Conditions	Applications	Rain and spring water drainage for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
Pump	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
	Impeller	Effluent Impeller
	Shaft Seal/Material	Double Mechanical Seal and one Oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS400/A36
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL 200
Strainer	SS 304
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	SS 410
Motor Housing	SS 304

Characteristic curves N=2900 rpm

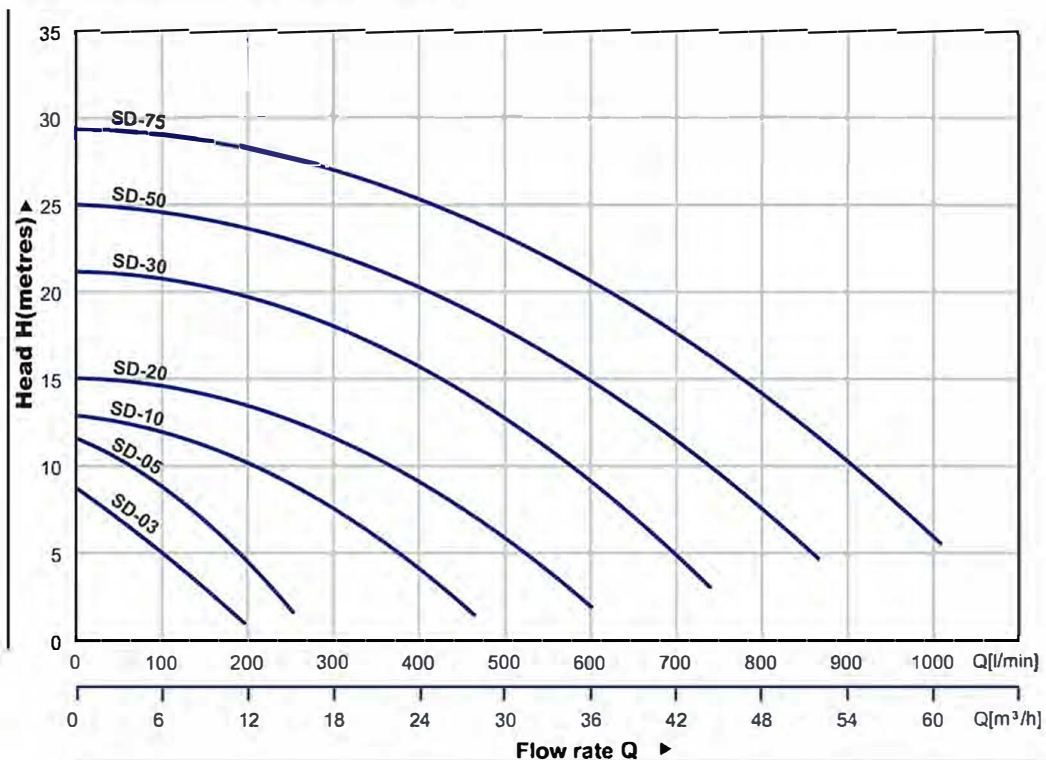


Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SD-03-50	1 $\frac{1}{3}$ (0.25)	2"	1 ϕ /3 ϕ	5	80	9	210	6	12.5	10
SD-05-50	1 $\frac{1}{2}$ (0.37)	2"	1 ϕ /3 ϕ	6	200	11	300	6	13.5	10
SD-10-50	1 (0.75)	2"	1 ϕ /3 ϕ	8	220	13	490	6	23.5	10
SD-20-50(80)	2 (1.5)	2"/3"	1 ϕ /3 ϕ	12	400	15	600	6	34	10
SD-30-50(80)	3 (2.2)	2"/3"	3 ϕ	15	400	21	800	6	35	10
SD-50-80(100)	5 (3.7)	3"/4"	3 ϕ	19	500	25	900	6	57	10
SD-75-80(100)	7.5 (5.5)	3"/4"	3 ϕ	25	600	29	1100	6	63	10

SD-03-50 ~ SD-05-50: Thread Type
SD-10-50: Elbow Type (2")
SD-20-50(80): Elbow Type (2" or 3")

SD-50-80(100) ~ SD-75-80(100): Elbow Type (3" or 4")
Auto Float Switches are available in Single-phase

Dimensions and Weights

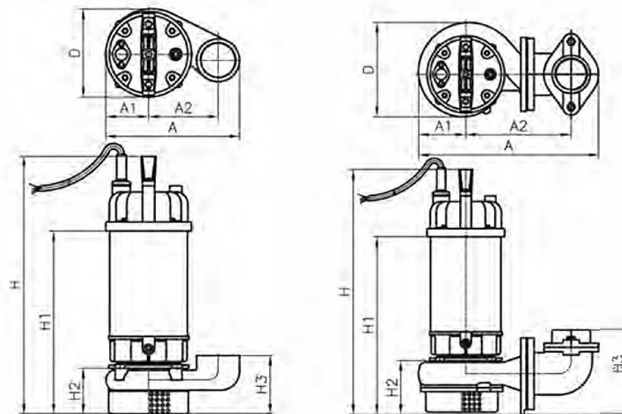

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SD-03-50	221	71	115	141	348	235	76	97
SD-05-50	221	71	115	141	373	260	76	97
SD-10-50	330	86	193	173	451	327	99	155
SD-20-50(80)	403	103	250	212	536	388	110	164
SD-30-50(80)	403	103	250	212	556	408	110	164
SD-50-80(100)	463	110	260	227	605	440	132	215
SD-75-80(100)	463	110	260	227	645	480	132	215


General Data/Material



Operating Conditions	Applications	Waste water and Sewage for domestic purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one Oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	NYLON SS400/A36
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL 200
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	SS 410
Motor Housing	SS 304

Characteristic curves N=2900 rpm

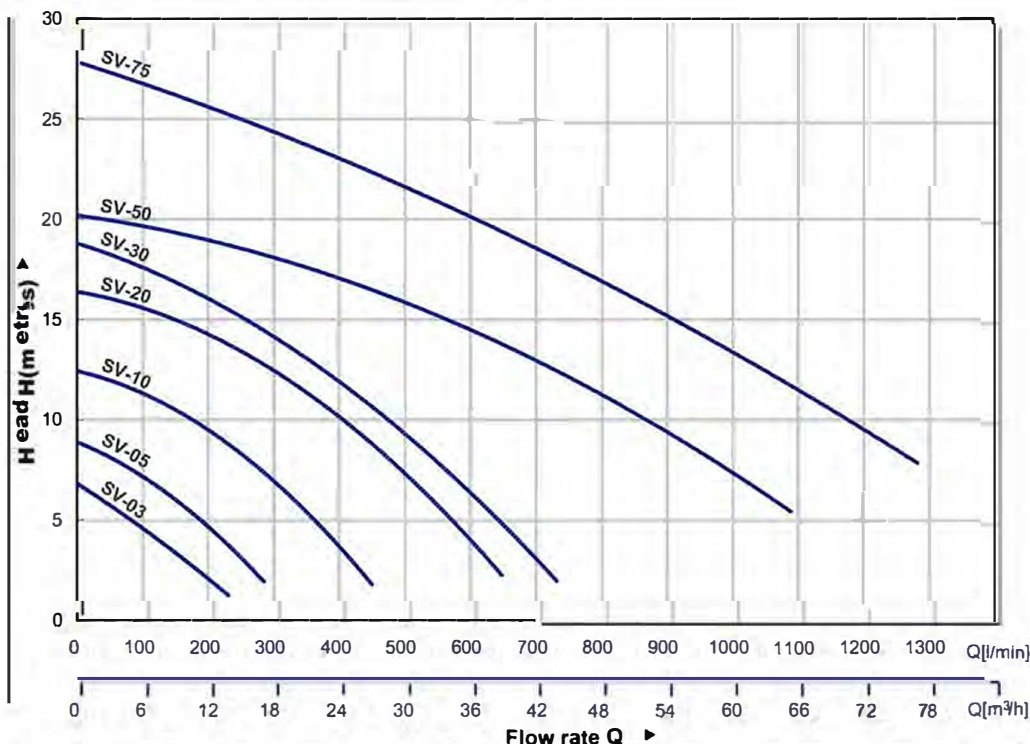


Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SV-03-50	1/3 (0.25)	2"	1φ/3φ	4	120	7	220	35	12.5	10
SV-05-50	1/2 (0.37)	2"	1φ/3φ	6	150	9	300	35	13.5	10
SV-10-50	1 (0.75)	2"	1φ/3φ	8	200	12	450	35	18.5	10
SV-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	400	17	650	35	34	10
SV-30-50(80)	3 (2.2)	2"/3"	3φ	11	450	19	750	35	35	10
SV-50-80(100)	5 (3.7)	3"/4"	3φ	15	550	20	1100	50	57	10
SV-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	650	28	1200	50	63	10

SV-03-50 ~ SV-05-50: Threaded Flange Type
SV-10-50: Threaded Flange Type or Elbow Type (2")

SV-20-50(80) ~ SV-30-50(80): Elbow Type (2" or 3")
SV-50-80(100) ~ SV-75-80(100): Elbow Type (3" or 4")
Auto Float Switches are available in Single-phase

Dimensions and Weights

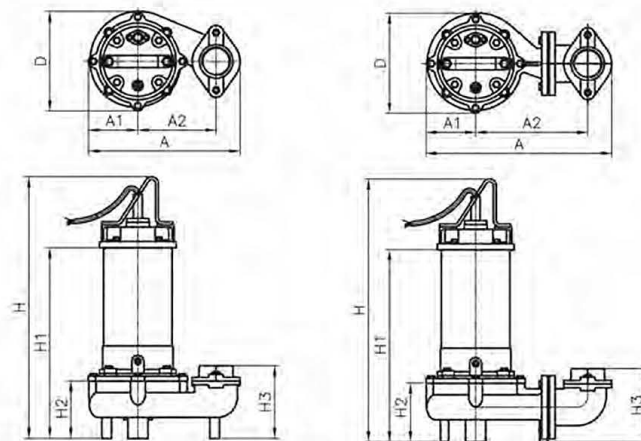

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SV-03-50	222	73	115	145	385	272	113	133
SV-05-50	222	73	115	145	410	297	113	133
SV-10-50	222	73	115	149	464	340	113	133
SV-20-50(80)	387	103	234	208	548	400	122	153
SV-30-50(80)	387	103	234	208	568	420	122	153
SV-50-80(100)	459	110	256	227	630	471	130	220
SV-75-80(100)	459	110	256	227	678	511	160	220


General Data/Material



Operating Conditions	Applications	Waste water and Sewage for domestic and industrial purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	SS 304
Motor Cover	SS 316
Seal Housing	SS 316
Bracket	Cast Iron G.JL 200
Oil Chamber	SS 316
Pump Housing	SS 316
Impeller	SS 316
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	VITON
Shaft	SS 316
Motor Housing	SS 316

Characteristic curves N=2900 rpm

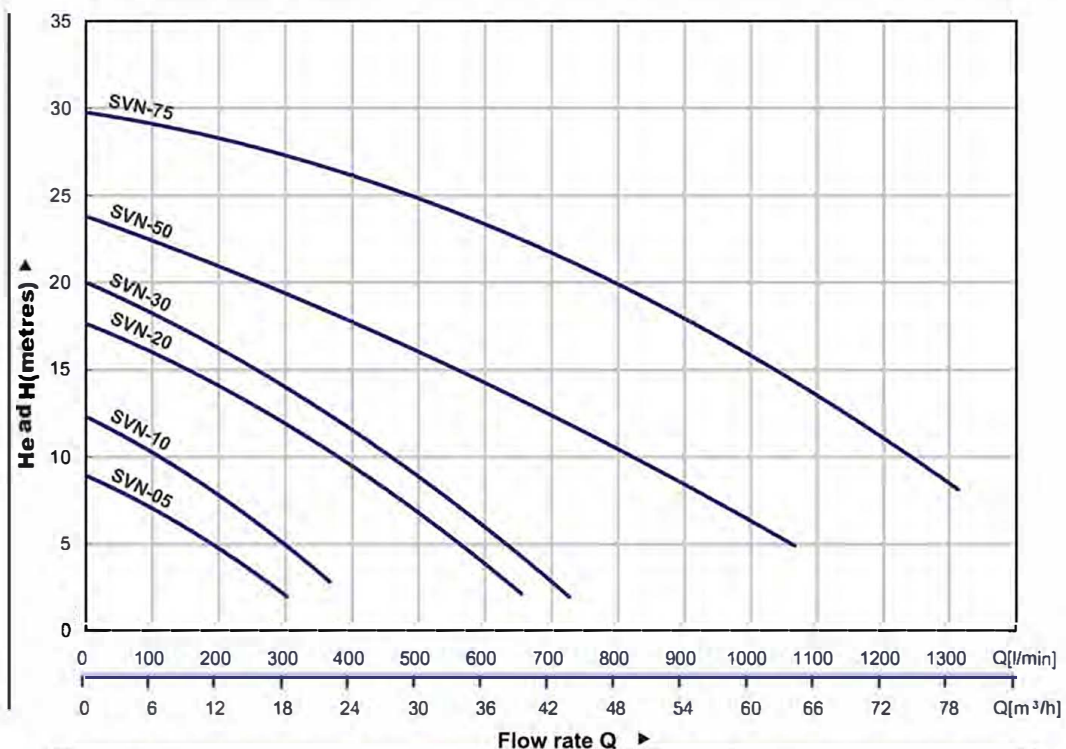

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SVN-05-50	1/2 (0.37)	2"	1 ϕ /3 ϕ	6	150	9	300	35	13.5	10
SVN-10-50	1 (0.75)	2"	1 ϕ /3 ϕ	8	200	13	400	35	18.5	10
SVN-20-50(80)	2 (1.5)	2"/3"	1 ϕ /3 ϕ	12	400	18	700	35	34	10
SVN-30-50(80)	3 (2.2)	2"/3"	3 ϕ	13	450	20	750	35	35	10
SVN-50-80(100)	5 (3.7)	3"/4"	3 ϕ	15	550	24	1100	50	57	10
SVN-75-80(100)	7.5 (5.5)	3"/4"	3 ϕ	20	700	30	1300	50	63	10

SVN-05-50: Thread Type


SVN-10-50: Thread Type or Elbow Type (2")

SVN-20-50(80) ~ SVN-30-50(80): Elbow Type (2" or 3")

SVN-50-80(100) ~ SVN-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

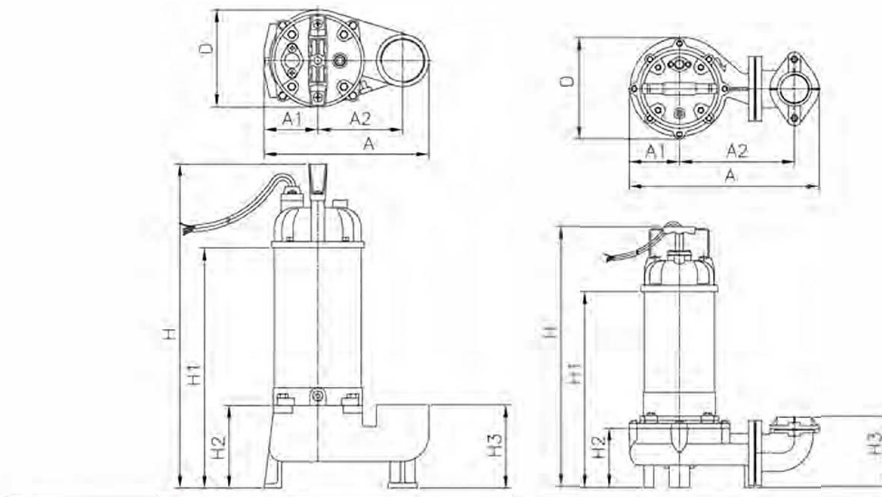

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SVN-05-50	224	73	115	132	409	296	112	113
SVN-10-50	224	73	115	132	439	326	112	113
SVN-20-50(80)	387	103	234	205	530	398	120	143
SVN-30-50(80)	387	103	234	205	550	418	120	143
SVN-50-80(100)	459	110	256	230	641	471	160	220
SVN-75-80(100)	459	110	256	230	681	511	160	220


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector
Pump	Impeller	Semi-Open Impeller with Tungstein Carbide Edge
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS400/A36
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJS 450
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Cutter edge	Tungsten
Shaft	SS 410
Motor Housing	SS 304

Characteristic curves N=2900 rpm

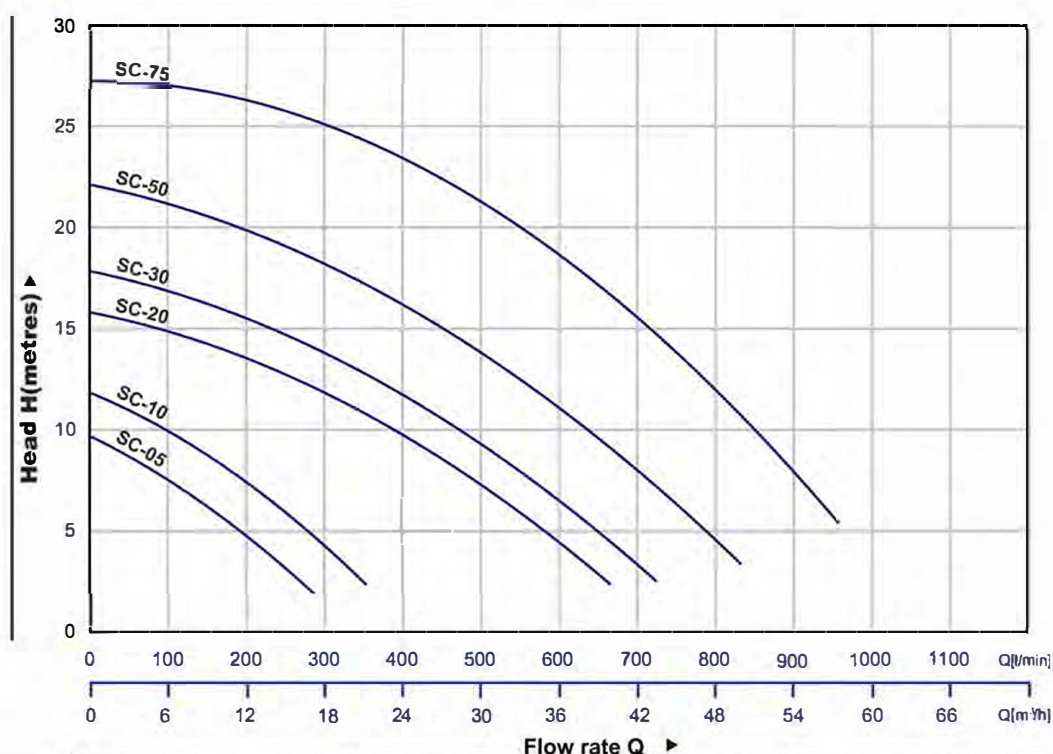

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SC-05-50	1/2 (0.37)	2"	1φ/3φ	6	150	8	300	22	13.5	10
SC-10-50	1 (0.75)	2"	1φ/3φ	9	210	12	400	22	18.5	10
SC-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	400	16	700	22	34	10
SC-30-50(80)	3 (2.2)	2"/3"	3φ	13	550	18	750	22	35	10
SC-50-80(100)	5 (3.7)	3"/4"	3φ	18	600	22	900	28	57	10
SC-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	650	28	1000	28	63	10

SC-05-50: Threaded Flange Type


SC-10-50: Threaded Flange type or Elbow Type

SC-20-50(80)~SC-30-50(80): Elbow Type (2" or 3")

SC-50-80(100)~SC-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

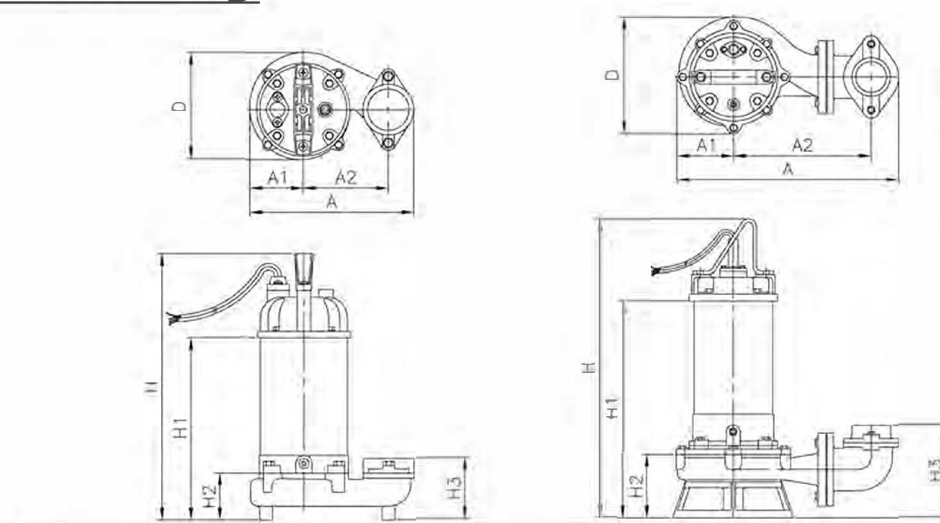

Model	Dimension (mm)							
	A	A1	A2	D	H	H1	H2	H3
SC-05-50	222	73	115	145	361	248	64	84
SC-10-50	222	73	115	149	416	292	64	84
SC-20-50(80)	403	103	250	212	541	393	115	169
SC-30-50(80)	403	103	250	212	561	413	115	169
SC-50-80(100)	463	110	260	227	610	445	137	220
SC-75-80(100)	463	110	260	227	650	485	137	220


General Data/Material



Operating Conditions	Applications	Waste water for domestic and civil purposes
	Fluid Temperature	0 to 40 °C
Motor	Type	Dry Type
	Pole	2-pole
	Insulation	Class F
	Protection	IP68
	Protection Device	Thermal Protector (single phase) Overload Protector (three phase)
Pump	Impeller	Vortex Impeller
	Shaft Seal/Material	Double Mechanical Seal and one oil Seal
	Bearing	Double-shielded Ball Bearing

Component	Material
Cable	H07RN-F
Handle	Nylon SS400/A36
Motor Cover	Cast Iron GJL 200
Seal Housing	Cast Iron GJL 200
Bracket	Cast Iron GJL 200
Oil Chamber	Cast Iron GJL 200
Pump Casing	Cast Iron GJL 200
Impeller	Cast Iron GJL
Agitator	SS 316
Mechanical seal: Upper	CA/CE
Lower	Sic/Sic
Oil Seal	NBR
Shaft	SS 410
Motor Housing	SS 304

Characteristic curves N=2900 rpm

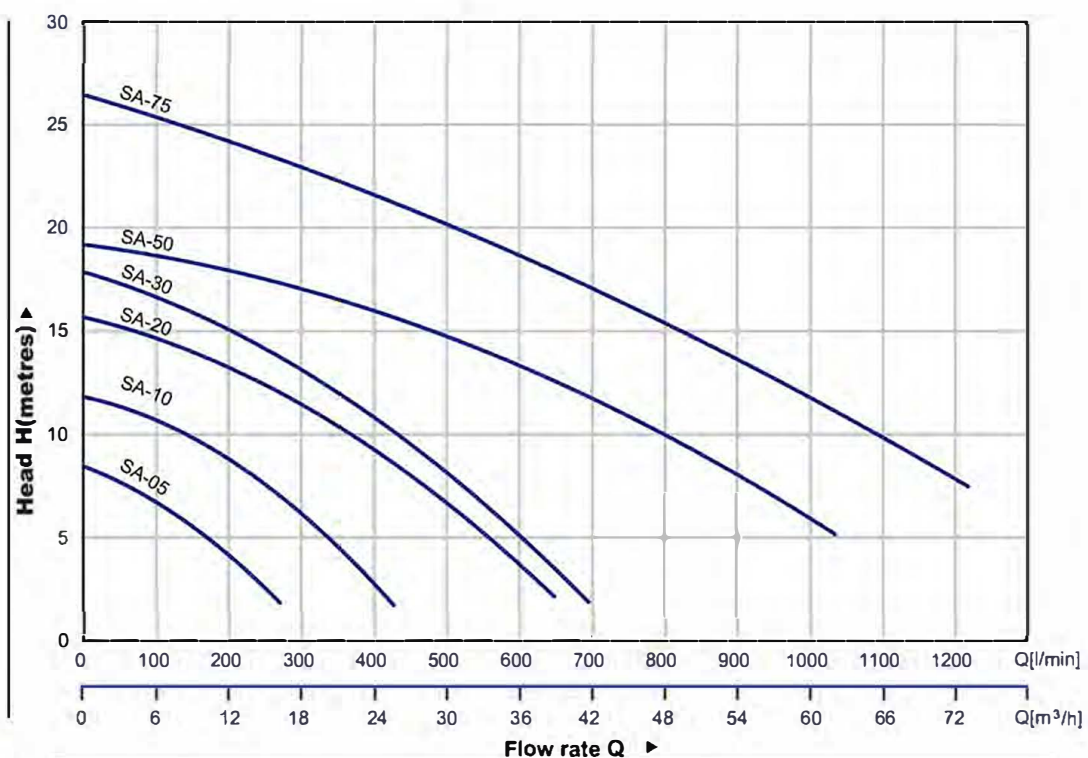

Specifications

Model	Power HP (kW)	Discharge inch	Phase	Standard		Max		Solid Passage mm	N.W. kg	Cable M
				Head M	Capacity LPM	Head M	Capacity LPM			
SA-05-50	1/2 (0.37)	2"	1φ/3φ	6	130	8	300	20	13.5	10
SA-10-50	1 (0.75)	2"	1φ/3φ	8	180	12	400	20	18.5	10
SA-20-50(80)	2 (1.5)	2"/3"	1φ/3φ	10	350	16	650	20	34	10
SA-30-50(80)	3 (2.2)	2"/3"	3φ	11	400	18	700	20	35	10
SA-50-80(100)	5 (3.7)	3"/4"	3φ	15	500	19	1000	35	57	10
SA-75-80(100)	7.5 (5.5)	3"/4"	3φ	20	600	27	1100	35	63	10

SA-05-50: Threaded Flange Type


SA-10-50: Threaded Flange type or Elbow Type

SA-20-50(80)~SA-30-50(80): Elbow Type (2" or 3")

SA-50-80(100)~SA-75-80(100): Elbow Type (3" or 4")

Auto Float Switches are available in Single-phase

Dimensions and Weights

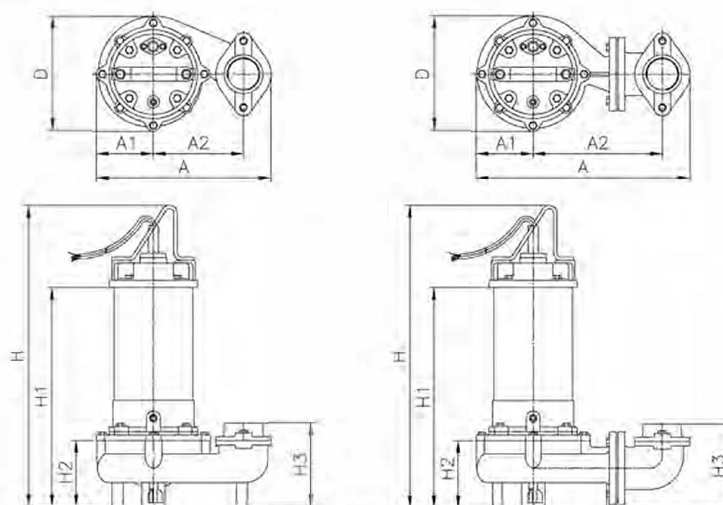

Model	Dimension (mm)							
	A	A1	A2	H	H	H1	H2	H3
SA-05-50	222	73	115	145	410	297	113	133
SA-10-50	222	73	115	149	464	340	113	133
SA-20-50(80)	387	103	234	208	548	400	122	153
SA-30-50(80)	387	103	234	208	568	420	122	153
SA-50-80(100)	459	110	256	227	638	471	160	220
SA-75-80(100)	459	110	256	227	678	511	160	220

Selection Table

Model	Connections	Guide Rail Models				
		TS-50	TM-50(80)	TL-80(100)	STM-50(80)	STL-80(100)
		Materials				
		EN-GJL-200	EN-GJL-200	EN-GJL-200	SS 316	SS 316
SD-03-50	elbow		▲			
SD-05-50	thread			NOT AVAILABLE		
SD-05-50	elbow		▲			
SD-10-50	thread			NOT AVAILABLE		
SD-10-50	elbow		●			
SD-20-50(80)	elbow		●			
SD-30-50(80)	elbow		●			
SD-50-80(100)	elbow			●		
SD-75-80(100)	elbow			●		
SV-3-50	thread/flange	●				
SV-05-50	thread/flange	●				
SV-05-50	elbow		▲			
SV-10-50	thread/flange	●				
SV-10-50	elbow		▲			
SV-20-50(80)	elbow		●			
SV-30-50(80)	elbow		●			
SV-50-80(100)	elbow			●		
SV-75-80(100)	elbow			●		
SVN-05-50	thread/flange			NOT AVAILABLE		
SVN-05-50	elbow				▲	
SVN-10-50	thread/flange			NOT AVAILABLE		
SVN-10-50	elbow				▲	
SVN-20-50(80)	elbow				●	
SVN-30-50(80)	elbow				●	
SVN-50-80(100)	elbow					●
SVN-75-80(100)	elbow					●
SC-05-50	thread/flange	●				
SC-05-50	elbow		▲			
SC-10-50	thread/flange	●				
SC-10-50	elbow		▲			
SC-20-50(80)	elbow		●			
SC-30-50(80)	elbow		●			
SC-50-80(100)	elbow			●		
SC-75-80(100)	elbow			●		
SA-05-50	thread/flange	●				
SA-05-50	elbow		▲			
SA-10-50	thread/flange	●				
SA-10-50	elbow		▲			
SA-20-50(80)	elbow		●			
SA-30-50(80)	elbow		●			
SA-50-80(100)	elbow			●		
SA-75-80(100)	elbow			●		



TS



TM



TL


TS Model: Angle type, 2" Discharge

TM Model: Tube type, available 2" or 3" Discharge

TL Model: Tube type, available 3" or 4" Discharge


▲ PUMPS WITH NON-STANDARD CONNECTIONS. IF TM-Tube Type Guide Rail to be used. Consult MASFLO.

TS

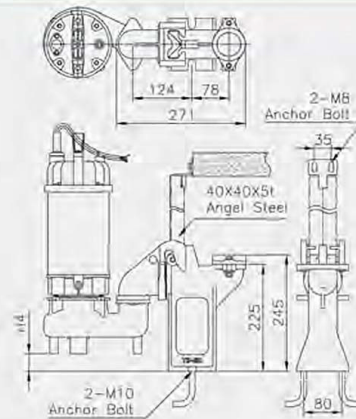


TS-50 Guide Rail			
Model	Output		Dimensions
	HP	kW	H4(mm)
SV-03-50	1/3	0.25	37
SV-05-50	1/2	0.37	37
SV-10-50	1	0.75	37
SA-05-50	1/2	0.37	37
SA-10-50	1	0.75	37
SC-05-50	1/2	0.37	75
SC-10-50	1	0.75	75
HM-05-50	1/2	0.37	65

TM

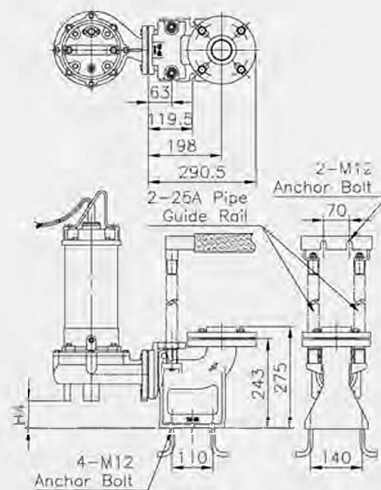

TM-50(80) Guide Rail			
Model	Output		Dimensions
	HP	kW	H4(mm)
SV-20-50/80	2	1.5	76
SV-30-50/80	3	2.2	76
SA-20-50/80	2	1.5	76
SA-30-50/80	3	2.2	76
SD-03-50	1/3	0.25	78
SD-05-50	1/2	0.37	78
SD-10-50	1	0.75	78
SD-20-50/80	2	1.5	65
SN-30-50/80	3	2.2	65
SC-20-50/80	2	1.5	60
SC-30-50/80	3	2.2	60
SVN-05-50	1/2	0.37	76
SVN-10-50	1	0.75	76
SVN-20-50/80	2	1.5	76
SVN-30-50/80	3	2.2	76

TL

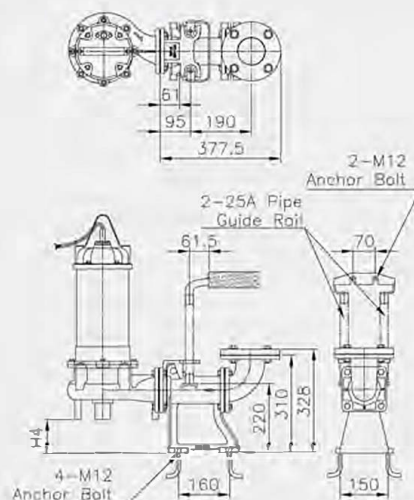

TL-80(100) Guide Rail			
Model	Output		Dimensions
	HP	kW	H4(mm)
SV-50-80/100	5	3.7	110
SV-75-80/100	7.5	5.5	110
SA-50-80/100	5	3.7	110
SA-75-80/100	7.5	5.5	110
SD-50-80/100	5	3.7	113
SD-75-80/100	7.5	5.5	113
SC-50-80/100	5	3.7	108
SC-75-80/100	7.5	5.5	108
SVN-50-80/100	5	3.7	108
SVN-75-80/100	7.5	5.5	108



INTERNATIONAL PUMPING SYSTEM - IPS PUMP

118 Avenue de Stalingrad - 92700 Colombes - France

Tel : +33 4 91 92 01 18

Fax: +33 4 91 98 11 30

Web: www.masflo.fr

Contact : info@masflo.fr