



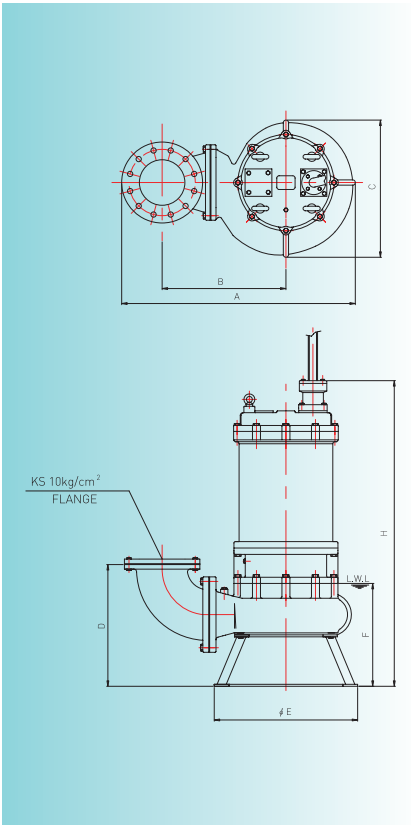

Submersible Pump

- Applications :
- Supply factory with industrial water
- Fountain, decorative waterfall.
- Features :
- Easy to maintain with auto discharge connector
- Minimize stopping-up of foreign materials

NO	NAME OF PARTS	MATERIAL
1	CAB TYRE CABLE	-
2	STUFFING BOX	GC200
3	UPPER BEARING	STB2
4	MOTOR BRACKET	GC200
5	MOTOR FRAME	GC200
6	MOTOR SHAFT	SCM440
7	BEARING COVER	GC200
8	BEARING HOUSING	GC200
9	WATER CHAMBER	GC200
10	OIL SEAL	N.B.R
11	PUMP CASING	GC200
12	IMPELLER	GCD450
13	SUCTION COVER	GC200
14	STAND	SS400
15	PROTECTED	N.B.R
16	EYE BOLT	SS400
17	STATOR	S-60
18	ROTOR	S-60
19	LOWER BEARING	STB2
20	OIL	TURBINE OIL
21	MECHANICAL SEAL	SILICON CARBIDE
22	FLANGE	SS400
23	ELBOW	GC200
24	OIL BOLT	SS400
25	SLEEVE	SCM440

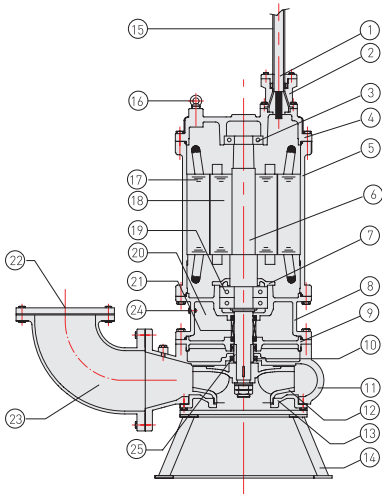

MODEL	A	B	C	D	E	F	H
DSB-2-8	498	250	340	210	340	360	457
DSB-2-15	527	280	340	213	340	430	533
DSB-3-22	573	310	340	254	340	510	624
DSB-3-37	573	310	340	254	340	510	624
DSB-4-55	615	340	340	276	340	560	677
DSB-4-75	615	340	340	276	340	560	677
DSB-6-55	782	450	396	375	340	660	827
DSB-6-75	782	450	396	375	340	660	827
DSB-6-110	850	460	500	435	500	800	983
DSB-6-150	850	460	500	435	500	800	983
DSB-6-220	940	500	600	470	600	950	1133
DSB-6-300	940	500	600	470	600	950	1133
DSB-6-370	1005	530	630	523	630	1215	1423
DSB-6-450	1005	530	630	523	630	1215	1423
DSB-6-550	1005	530	630	523	630	1215	1423
DSB-8-110	1010	582	546	460	500	830	1006
DSB-8-150	1010	582	546	460	500	830	1006
DSB-8-220	1015	575	550	520	550	1010	1198
DSB-8-300	1015	575	550	520	550	1010	1198
DSB-8-370	1030	580	584	500	550	1090	1301
DSB-8-450	1030	580	584	500	550	1090	1301
DSB-8-550	1030	580	584	500	550	1090	1301
DSB-10-110	1238	675	750	688	725	1100	1279
DSB-10-150	1238	675	750	688	725	1100	1279
DSB-10-220	1075	600	550	560	545	1010	1198
DSB-10-300	1075	600	550	560	545	1010	1198








MODEL	A	B	C	D	E	F	H
DSB-10-370	1182	655	653	600	552	1170	1378
DSB-10-450	1182	655	653	600	552	1170	1378
DSB-10-550	1182	655	653	600	552	1170	1378
DSB-10-750	1182	655	653	600	552	1270	1378
DSB-12-220	1348	795	820	665	552	1130	1332
DSB-12-300	1348	795	820	665	552	1130	1332
DSB-12-370	1430	795	820	665	552	1200	1416
DSB-12-450	1430	795	820	665	552	1200	1416
DSB-12-550	1430	795	820	665	552	1300	1516
DSB-12-750	1430	795	820	665	552	1300	1516
DSB-14-220	1735	970	915	790	620	1260	1446
DSB-14-300	1735	970	915	790	620	1260	1446
DSB-14-370	1518	835	945	880	875	1420	1633
DSB-14-450	1518	835	945	880	875	1420	1633
DSB-14-550	1518	835	945	880	875	1520	1733
DSB-14-750	1518	835	945	880	875	1505	1763
DSB-16-300	1593	875	945	910	875	1420	1633
DSB-16-370	1593	875	945	910	875	1420	1633
DSB-16-450	1593	875	945	910	875	1420	1633
DSB-16-550	1593	875	945	910	875	1520	1733
DSB-16-750	1593	875	945	910	875	1505	1963
DSB-20-370	2093	1200	1100	1268	1050	1890	2366
DSB-20-450	2093	1200	1100	1268	1050	1990	2466
DSB-20-550	2093	1200	1100	1268	1050	1800	2258
DSB-20-750	2093	1200	1100	1268	1050	1990	2466



with giving you satisfactions
by a credence and a powerful performance...

구경 (mm)	형식 (Pump Model)	출력 (kw)	전양정 (m)	토출량 (m^3/min)	회전수 (rpm)	중량 (kg)
50	DSB-2-8	0.75	8	0.21	1800	52
	DSB-2-15	1.5	8	0.5	1800	63
80	DSB-3-22	2.2	10	0.6	1800	82
	DSB-3-37	3.7	10	1	1800	93
100	DSB-4-55	5.5	14	1	1800	140
	DSB-4-75	7.5	18	1	1800	180
150	DSB-6-55	5.5	6	2.5	1800	179
	DSB-6-75	7.5	9	2.5	1800	200
	DSB-6-110	11	15	2.5	1800	310
	DSB-6-150	15	20	2.5	1800	350
	DSB-6-220	22	25	2.5	1800	450
	DSB-6-300	30	30	2.5	1800	490
	DSB-6-370	37	33	2.9	1800	590
	DSB-6-450	45	37	2.9	1800	630
200	DSB-8-550	55	41	2.9	1800	670
	DSB-8-110	11	10	4.5	1800	320
	DSB-8-150	15	14	4.5	1800	340
	DSB-8-220	22	18	4.5	1800	480
	DSB-8-300	30	22	4.5	1800	520
	DSB-8-370	37	28	4.5	1800	650
	DSB-8-450	45	32	4.5	1800	680
	DSB-8-550	55	40	4.5	1800	710


구경 (mm)	형식 (Pump Model)	출력 (kw)	전양정 (m)	토출량 (m^3/min)	회전수 (rpm)	중량 (kg)
250	DSB-10-110	11	6	7	1200	350
	DSB-10-150	15	9	7	1200	380
	DSB-10-220	22	11	7	1800	480
	DSB-10-300	30	14	7	1800	510
	DSB-10-370	37	19	7	1800	730
	DSB-10-450	45	24	7	1800	750
	DSB-10-550	55	30	7	1800	780
	DSB-10-750	75	40	7	1800	880
300	DSB-12-220	22	9	10	1200	510
	DSB-12-300	30	11	10	1200	550
	DSB-12-370	37	15	10	1200	800
	DSB-12-450	45	18	10	1200	870
	DSB-12-550	55	21	10	1200	930
	DSB-12-750	75	31	10	1200	1070
350	DSB-14-220	22	6	15	1200	600
	DSB-14-300	30	7.5	15	1200	800
	DSB-14-370	37	9	15	1200	880
	DSB-14-450	45	12	15	1200	900
	DSB-14-550	55	14	15	1200	990
	DSB-14-750	75	20	15	1200	1150
400	DSB-16-300	30	5	20	900	880
	DSB-16-370	37	7	20	900	960
	DSB-16-450	45	9	20	1200	1000
	DSB-16-550	55	12	20	1200	1050
500	DSB-16-750	75	16	20	1200	1250
	DSB-20-370	37	5	30	720	1050
	DSB-20-450	45	6	30	720	1100
	DSB-20-550	55	7.5	30	900	1250
	DSB-20-750	75	10	30	900	1500

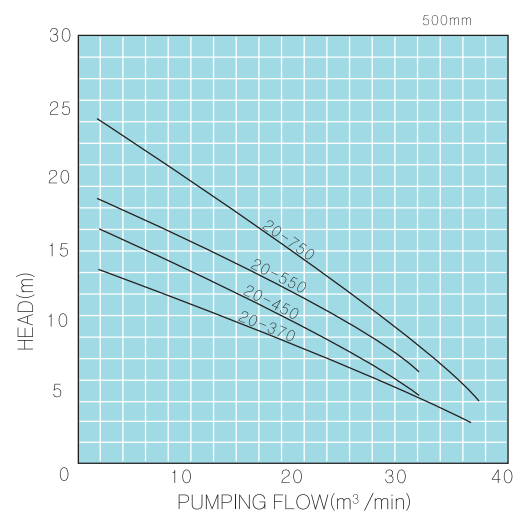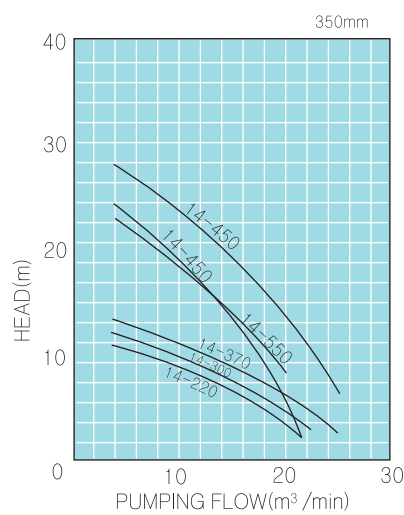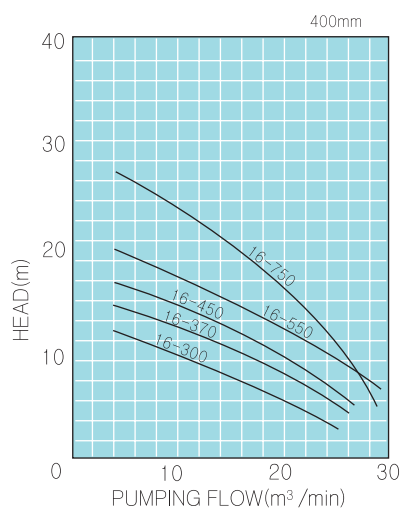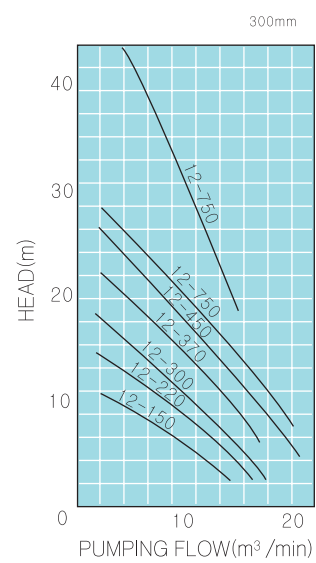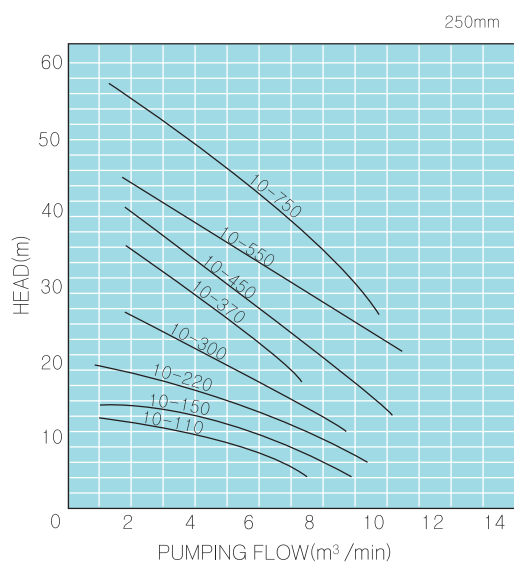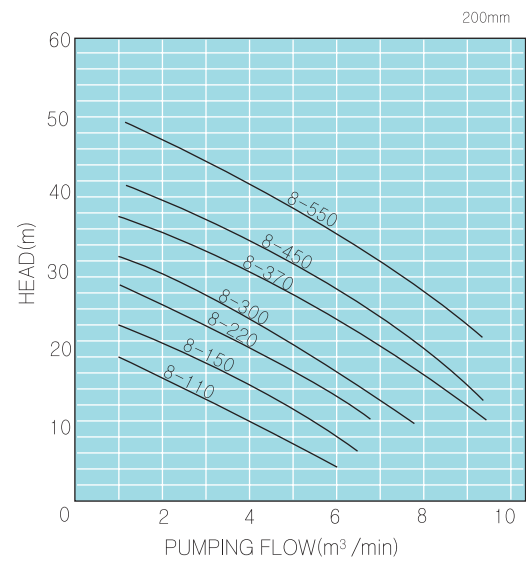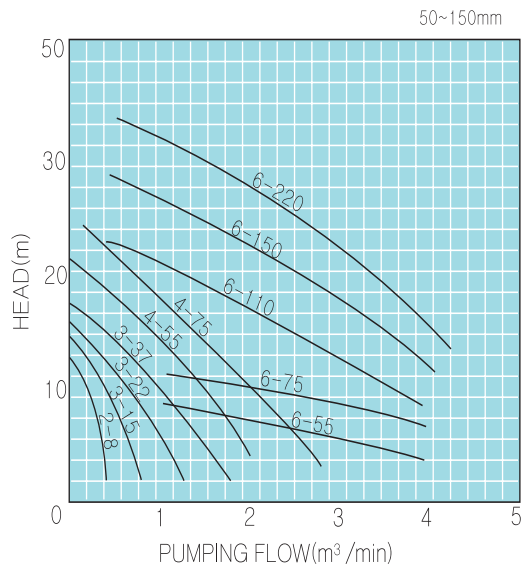



Waste Water & Effluent Pump



- Applications :** Effluent transfer from waste & sewage water treatment plant
Subway station, underground, industrial site
- Features :** Easy to maintain with auto discharge connector
Equipped with semi-open impeller

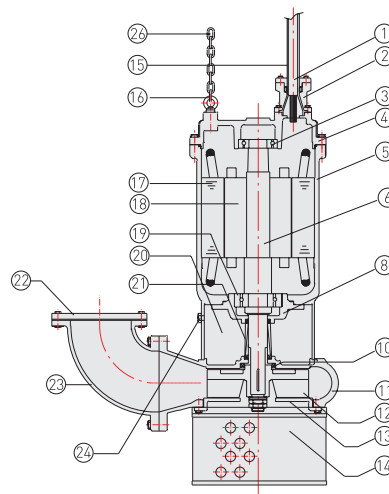


NO	NAME OF PARTS	MATERIAL
1	CAB TYRE CABLE	-
2	STUFFING BOX	GC200
3	UPPER BEARING	STB2
4	MOTOR BRACKET	GC200
5	MOTOR FRAME	GC200
6	MOTOR SHAFT	SCM440
7	BEARING COVER	GC200
8	BEARING HOUSING	GC200
9	WATER CHAMBER	GC200
10	OIL SEAL	N.B.R
11	PUMP CASING	GC200
12	IMPELLER	GCD450
13	SUCTION COVER	GC200
14	STAND	SS400
15	PROTECTED	N.B.R
16	EYE BOLT	SS400
17	STATOR	S-60
18	ROTOR	S-60
19	LOWER BEARING	STB2
20	OIL	TURBINE OIL
21	MECHANICAL SEAL	SILICON CARBIDE
22	FLANGE	SS400
23	ELBOW	GC200
24	OIL BOLT	SS400
26	CHAIN	SS400

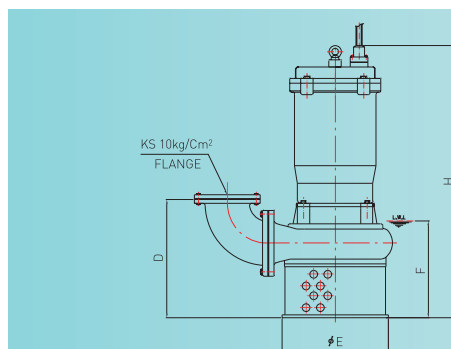

MODEL	A	B	C	D	E	F	H
DHS-2-8	385	220	173	192	180	330	412
DHS-2-15	415	233	208	179	202	390	490
DHS-3-22	460	260	208	211	202	390	490
DHS-3-37	495	270	208	248	246	470	592
DHS-4-55	495	270	208	248	246	470	592
DHS-4-75	570	310	306	320	306	620	802
DHS-4-110	570	310	306	320	306	620	862
DHS-4-150	570	310	306	320	306	620	862



구경 (mm)	형식 (Pump Model)	출력 (kw)	전압정 (m)	토출량 (m³/min)	회전수 (rpm)	중량 (kg)
50	DHS-2-8	0.75	10	0.2	3600	47
	DHS-2-15	1.5	15	0.3	3600	60
80	DHS-3-22	2.2	20	0.3	3600	65
	DHS-3-37	3.7	20	0.5	3600	85
100	DHS-4-55	5.5	25	0.6	3600	130
	DHS-4-75	7.5	30	0.8	3600	140
	DHS-4-110	11.0	35	1.0	3600	180
	DHS-4-150	15.0	40	1.2	3600	220

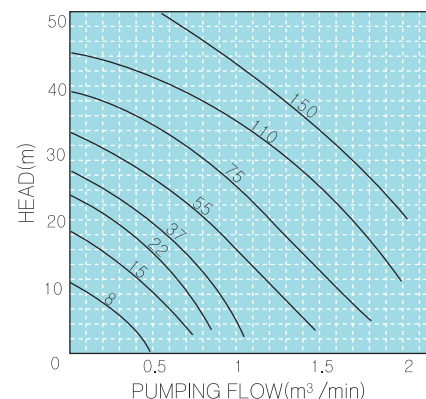

Submersible Cutter Pump


Applications : Waste Water
Features : Draining waste and waste water of a cattle shed and kitchen
Moving wastes and excretion / Wastes water plant building of
and hospital, factory

NO	NAME OF PARTS	MATERIAL
1	CAB TYRE CABLE	
2	STUFFING BOX	GC200
3	UPPER BEARING	STB2
4	MOTOR BRACKET	GC200
5	MOTOR FRAME	GC200
6	MOTOR SHAFT	SCM440
7	BEARING COVER	GC200
8	BEARING HOUSING	GC200
9	WATER CHAMBER	GC200
10	OIL SEAL	N.B.R
11	PUMP CASING	GC200
12	IMPELLER	GCD500
13	SUCTION COVER	GC200
14	STAND	GC200
15	PROTECTED	N.B.R
16	EYE BOLT	SS400
17	STATOR	S-60
18	ROTOR	S-60
19	LOWER BEARING	STB2
20	OIL	TURBINE OIL
21	MECHANICAL SEAL	SILICON CARBIDE
22	PIPE FLANGE	SS400
23	ELBOW	GC200
24	OIL BOLT	SS400

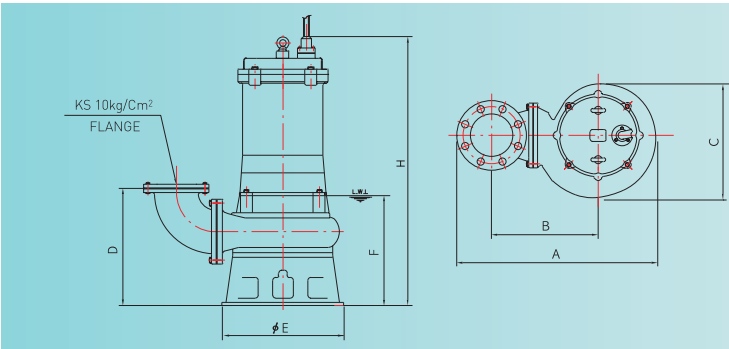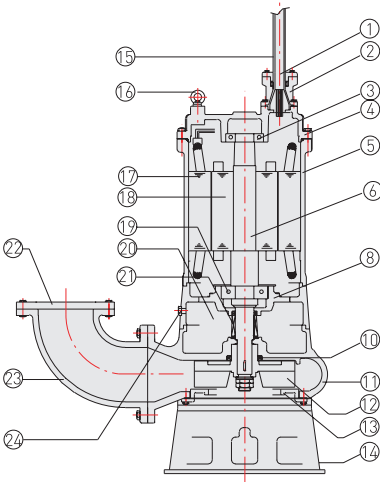

MODEL	A	B	C	D	E	F	H
DHC-2-8	383	220	173	190	190	140	385
DJC-2-8	498	250	340	210	340	360	457
DJC-2-15	527	280	340	213	340	430	533
DJC-3-22	573	310	340	254	340	510	624
DJC-3-37	573	310	340	254	340	510	624
DJC-4-55	615	340	340	276	340	560	677
DJC-4-75	615	340	340	276	340	560	677
DJC-4-110	782	450	396	375	340	260	820
DJC-4-150	782	450	396	375	340	260	820

구경 (mm)	형식 (Pump Model)	출력 (kw)	전압정 (m)	토출량 (㎡/min)	회전수 (rpm)	중량 (kg)
50	DHC-2-8	0.75	8	0.21	3600	50
	DJC-2-8	0.8	8	0.21	1800	52
	DJC-2-15	1.5	8	0.50	1800	63
80	DJC-3-22	2.2	8	0.65	1800	82
	DJC-3-37	3.7	11	0.70	1800	93
100	DJC-4-55	5.5	13	0.80	1800	140
	DJC-4-75	7.5	16	0.80	1800	180
	DJC-4-110	11.0	20	0.80	1800	230
	DJC-4-150	15.0	22	1.20	1800	270

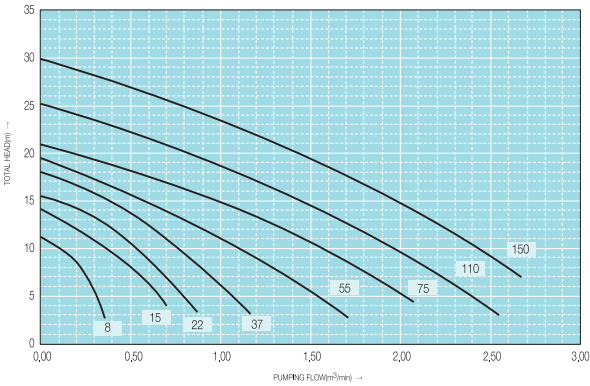



INTERNATIONAL PUMPING SYSTEM - IPS PUMP

118 Avenue de Stalingrad - 92700 Colombes - France

Tel : +33 4 91 92 01 18

Fax: +33 4 91 98 11 30

Web: www.masflo.fr

Contact : info@masflo.fr